



## "Q-Cord" Museum Barrier with Surface Mounted (Fixed) Base

7 feet of retractable cord to control foot traffic & queue patrons anywhere.



Q-Cord retractable barriers have a clean, architectural look and feel that enhances whatever it showcases. Designed to exceed ADA requirements, the world's thinnest retractable system is easy to set up and arrange. Flexible design options, handmade in the USA with stainless steel components, allow for positioning with either a freestanding or magnetic base, floor socket or screw-fixed floor plate.



Screw-fixed plate



Screw-fixed plate with cover

For more information call  
Call: 877-400-0777 • Fax: 877-414-0777  
Order Online: [www.CrowdControlDIRECT.com](http://www.CrowdControlDIRECT.com)

# Screw Down Base Plate Installation Instructions

## Whats Included



**Cover Plate**  
(Shown face up with masking)  
Masking to remain on during  
installation  
Material: 304 Stainless steel



**Floor Plate**  
(Shown face up with included  
anti-rotation pin)  
Material: 304 Stainless steel



**Allen Wrench**  
For tightening bottom bolt  
Material: Varies



**Bottom Bolt**  
Flat head, 8MM thread  
Material: 18-8 Stainless steel  
(May already be inserted in post)

## Additional Items



**Rubber Band**  
To aid in installation of floor plate  
and keep cover plate safe



**#8 Stainless Screws**  
To secure plate to ground.  
Exact screw used will vary with  
flooring. (i.e. wood, cement, etc)  
[Pilot hole in flooring recommended]



**Cordless Drill**  
To install screws and drill pilot  
holes as needed

Step 1: Slide cover plate masking up (toward cords) onto the post from the bottom.



Step 2: Use rubber band under cover plate to hold it in position



Step 3: Align base plate with post. Pin in side hole will prevent rotation.



Step 4: Insert and tighten bottom bolt to create a solid connection.



Step 5: Place base onto floor and orient cords in desired direction. Place posts approx 7' apart



Step 6: Screw plate to floor using appropriate screws. (Size #8)



Step 7: Remove rubber band.





Step 8: Remove masking peel coat.



# Screw Fixed Base Model

Q-Cord Barrier

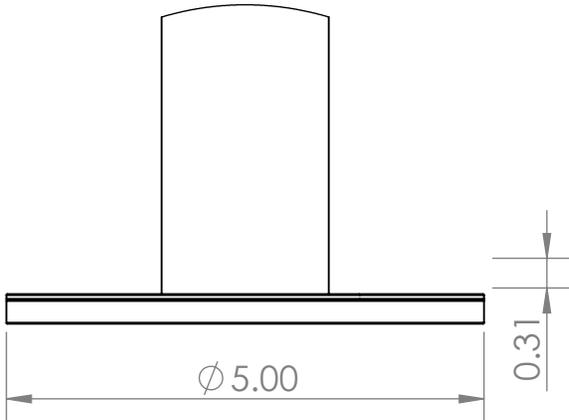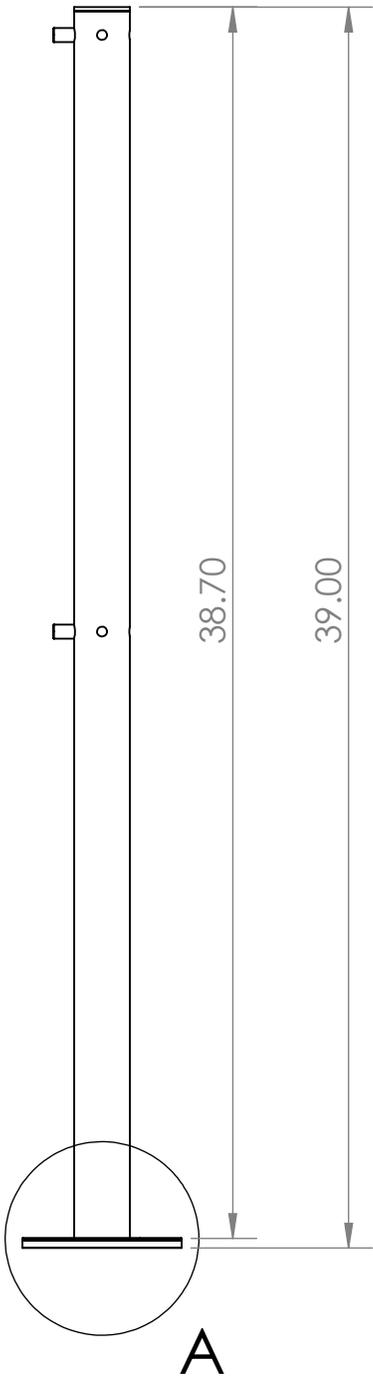

DETAIL A

For more information call  
Call: 877-400-0777 • Fax: 877-414-0777  
Order Online: [www.CrowdControlDIRECT.com](http://www.CrowdControlDIRECT.com)